


Product Features / 產品特性

Operating Temperature 操作溫度	Operating temperature / 操作溫度範圍：-55°C~125°C When choosing the fuses specification, if the operating environmental temperature beyond the scope from 20~30°C, you should consider the environmental temperature's affection to fuses. 若貴司操作環境溫度超出25±5°C範圍，在選用保險絲規格時，需考慮操作環境溫度對保險絲的影響。
Storage Conditions 儲存條件	Under airtight in temperature +10°C~60°C、relative humidity ≤75% can store 3 years. 在溫度+10°C~60°C、相對濕度≤75%的密閉條件下可存放3年。 Without dew in temperature+10°C~60°C、relative humidity be 95% maximum value for 30 days. 在溫度+10°C~60°C、相對濕度為95%的非露天下最多可存放30天。
Installation Way & Parameters 安裝方式及條件	Stud-mount / 螺柱安裝
	Wave soldering parameters / 波峰焊
	Solder pot temperature / 錫爐溫度：260±3°C Max Solder dwell time / 焊接時間：10s Max
	Hand welding parameters / 手工焊
	Solder iron temperature / 烙鐵溫度：350±5°C Heating time / 焊接時間：5s Max



Dimensions / 尺寸圖 (Unit / 單位:mm)

WH33-XXX-M6

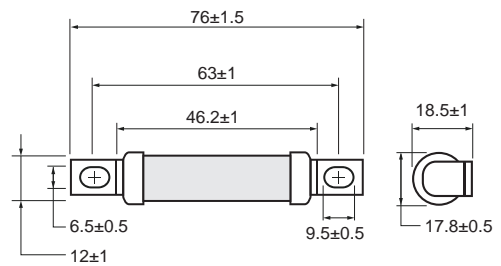

Electrical Characteristics / 電氣特性

Type 品名	Ordering P / N 料號	Rated Current 額定電流	Breaking Capacity 分斷能力	Safety Approvals 安全認證
WH33	WH33-XXX-M6			
	WH33-35-M6	35A	500VAC / 50KA 500VDC / 50KA	●
	WH33-40-M6	40A		●
	WH33-45-M6	45A		●
	WH33-50-M6	50A		●
	WH33-60-M6	60A		●
	WH33-70-M6	70A		●
	WH33-80-M6	80A		●
	WH33-90-M6	90A		●
WH33-100-M6	100A	●		