


I-T Characteristics / 時間-電流特性

Ampere Rating 額定電流	% of Ampere Rating 額定電流%	Opening Time 熔斷時間
200mA~30A	100%	4 Hrs Min. / 最短4小時
	250%	120s Max. / 最長120秒

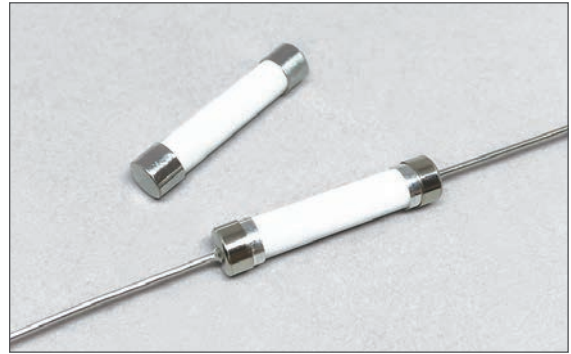


Product Features / 產品特性


Operating Temperature 操作溫度	<p>Operating temperature / 操作溫度範圍: -55°C~125°C</p> <p>When choosing the fuses specification, if the operating environmental temperature beyond the scope from 20~30°C, you should consider the environmental temperature's affection to fuses.</p> <p>若貴司操作環境溫度超出25±5°C範圍，在選用保險絲規格時，需考慮操作環境溫度對保險絲的影響。</p>
Storage Conditions 儲存條件	<p>Under airtight in temperature +10°C~60°C、relative humidity ≤75% can store 3 years.</p> <p>在溫度+10°C~60°C、相對濕度≤75%的密封條件下可存放3年。</p> <p>Without dew in temperature+10°C~60°C、relative humidity be 95% maximum value for 30 days.</p> <p>在溫度+10°C~60°C、相對濕度為95%的非露天下最多可存放30天。</p>
Installation Way & Parameters 安裝方式及條件	<p>Wave soldering parameters / 波峰焊</p> <p>Solder pot temperature / 錫爐溫度: 260±3°C Max</p> <p>Solder dwell time / 焊接時間: 10s Max</p> <hr/> <p>Hand welding parameters / 手工焊</p> <p>Solder iron temperature / 烙鐵溫度: 350±5°C</p> <p>Heating time / 焊接時間: 5s Max</p>

Dimensions / 尺寸圖 (Unit / 單位:mm)


WM30-XXX




WM30-XXX-P

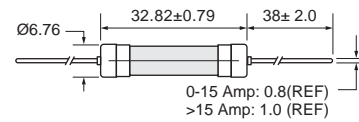

WM30-XXX-P-L

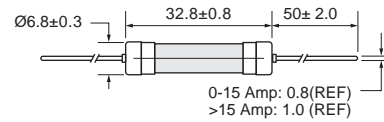

WM30-XXX-P-SXL

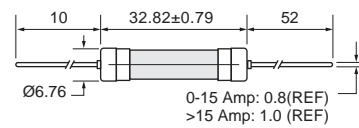

Electrical Characteristics / 電氣特性

Type 品名	Ordering P / N 料號		Rated Current 額定電流	Breaking Capacity 分斷能力	Safety Approvals 安全認證
WM30	WM30-XXX	WM30-XXX-P (-P-L / -P-SXL)		660VAC / 1000A 660VDC / 1000A	
	WM30-0.2	WM30-0.2-P (-P-L / -P-SXL)	200mA		
	WM30-0.25	WM30-0.25-P (-P-L / -P-SXL)	250mA		
	WM30-0.315	WM30-0.315-P (-P-L / -P-SXL)	315mA		
	WM30-0.4	WM30-0.4-P (-P-L / -P-SXL)	400mA		
	WM30-0.5	WM30-0.5-P (-P-L / -P-SXL)	500mA		
	WM30-0.6	WM30-0.6-P (-P-L / -P-SXL)	600mA		
	WM30-0.8	WM30-0.8-P (-P-L / -P-SXL)	800mA		
	WM30-1	WM30-1-P (-P-L / -P-SXL)	1A		
	WM30-1.25	WM30-1.25-P (-P-L / -P-SXL)	1.25A		
	WM30-1.6	WM30-1.6-P (-P-L / -P-SXL)	1.6A		
	WM30-2	WM30-2-P (-P-L / -P-SXL)	2A		
	WM30-2.5	WM30-2.5-P (-P-L / -P-SXL)	2.5A		
	WM30-3	WM30-3-P (-P-L / -P-SXL)	3A		
	WM30-3.15	WM30-3.15-P (-P-L / -P-SXL)	3.15A		
	WM30-4	WM30-4-P (-P-L / -P-SXL)	4A		
	WM30-5	WM30-5-P (-P-L / -P-SXL)	5A		
	WM30-6	WM30-6-P (-P-L / -P-SXL)	6A		
	WM30-8	WM30-8-P (-P-L / -P-SXL)	8A		
	WM30-10	WM30-10-P (-P-L / -P-SXL)	10A		
WM30-12	WM30-12-P (-P-L / -P-SXL)	12A			
WM30-12.5	WM30-12.5-P (-P-L / -P-SXL)	12.5A			
WM30-15	WM30-15-P (-P-L / -P-SXL)	15A			
WM30-16	WM30-16-P (-P-L / -P-SXL)	16A			
WM30-20	WM30-20-P (-P-L / -P-SXL)	20A			
WM30-25	WM30-25-P (-P-L / -P-SXL)	25A			
WM30-30	WM30-30-P (-P-L / -P-SXL)	30A			